


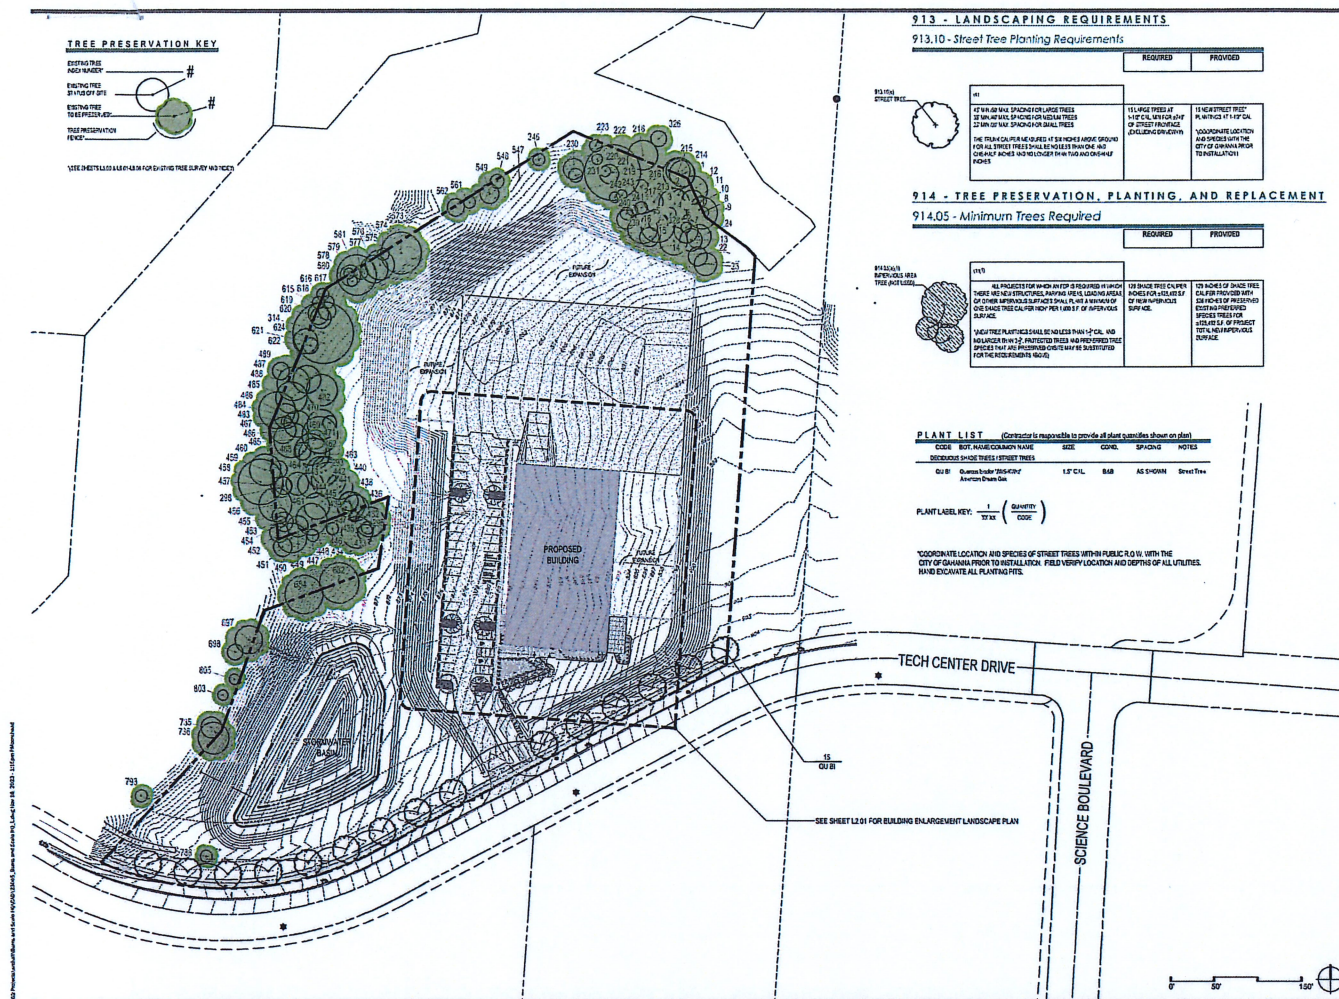

913 - LANDSCAPING REQUIREMENTS

913.10 - Street Tree Planting Requirements

REQUIRED	PROVIDED
15 LARGE TREES AT 4" X 6" CAL. MIN FOR 1/4 MI OF STREET FRONTAGE (INCLUDING DRIVEWAYS)	15 NEW STREET TREE PLANTINGS AT 4" X 6" CAL. APPROPRIATE LOCATION AND SPECIES WITH THE CITY OF OHAWHIA PRIOR TO INSTALLATION

914 - TREE PRESERVATION, PLANTING, AND REPLACEMENT

914.05 - Minimum Trees Required

	REQUIRED	PROVIDED
129 SHADE TREE CALIPER INCHES FOR ± 12 INCHES S.F. OF NEW IMPERVIOUS SURFACE.	129 INCHES OF SHADE TREE CALIPER PROVIDED WITH 304 INCHES OF PRESERVE EXIST AND PRESERVE SPECIES TREES FOR ± 12 INCHES S.F. OF PROJECT TOTAL NEW IMPERVIOUS SURFACE.	

PLANT LIST (Contractor is responsible to provide all plant quantities shown on plan)						
CODE	BOT. NAME, COMMON NAME	SIZE	COND.	SPACING	NOTES	
DECIDUOUS SHADE TREES / STREET TREES						
QU 81	Quercus laevis "Stinkhorn" Southern Live Oak	1.5" CAL.	B&B	AS SHOWN	Street Tree	

PLANT LABEL KEY: $\frac{1}{YY XX} \left(\frac{\text{QUANTITY}}{\text{CODE}} \right)$

*COORDINATE LOCATION AND SPECIES OF STREET TREES WITHIN PUBLIC R.O.W. WITH THE CITY OF SAHANNA PRIOR TO INSTALLATION. FIELD VERIFY LOCATION AND DEPTHS OF ALL UTILITIES. HAND EXCAVATE ALL PLANTING PITS.

[illegible]

BURNS & SCALO GAHANNA
TECH CENTER DRIVE
GAHANNA, OH 43230

Prepared for:
archhall

REVISIONS

[illegible]

drawn by PDM checked by DG
issue date 11.16.2023 PROJECT NO. 2306

**SITE
LANDSCAPE
PLAN**

L1.01

