

III a. Source(s) of Brine:

<u>Company Name:</u>	<u>Address:</u>	<u>Registration No:</u>
B&J drilling Company	<u>13911 Millersburg Rd</u>	<u>UIC- 042</u>
	<u>P.O. Box X</u>	
	<u>Danville, Ohio 43014</u>	

III b. <u>Hauler:</u>	<u>Address:</u>	<u>Registration No:</u>
B&J Drilling Company	<u>- same as above-</u>	<u>UIC- 042</u>
	<u></u>	
	<u></u>	

IV. Surface Disposal Sites:

<u>County:</u>	<u>Township:</u>	<u>Address of Operation Area(s):</u>
Franklin	<u>Jefferson</u>	<u>1900 Deffenbaugh Court</u>
		<u>Gahanna, Ohio 43230</u>
		<u></u>

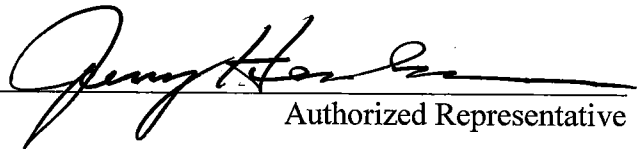
V. Method, Rate and Frequency of Brine Application:

A. Haul Roads and Parking Lots/Areas

1. Brice will not be applied more than once per week, or:
 - a. To a water-saturated surface;
 - b. Directly to vegetation near or adjacent to surfaces being treated;
 - c. Within twelve feet of structures crossing bodies of water or crossing drainage ditches.
 - d. Between sundown and sunrise, except for ice control.
2. The discharge of brine through the spreader bar will stop when the application stops.
3. The applicator vehicle will be moving at least five miles per hour at all times while the brine is being applied.

V. Method, Rate and Frequency of Brine Application (CON'T):

4. The maximum spreader bar nozzle opening shall be three quarter of an inch in diameter.
5. The maximum uniform application rate of brine will be three thousand gallons per mile on a twelve foot wide road or three gallons per sixty square feet on unpaved lots.
6. The applicator vehicle discharge valve will be closed between the brine collection or storage point and the specific surfaces that have been approved for brine application.
7. Any valves that provide for tank drainage other than through the spreader bar will be closed during the brine application and transport.
8. The angle of discharge from the applicator vehicle spreader bar will not be greater than sixty degrees from the perpendicular to the unpaved surface.
9. Only the last twenty-five percent of an applicator vehicle's contents will be allowed to have pressure greater than atmospheric pressure; therefore, the first seventy-five percent of the applicator vehicle's contents will be discharged under atmospheric pressure.
10. Only brine that is produced from a well that is not a horizontal well shall be allowed to be spread on a road. Fluids from the drilling of a well, flowback from the stimulation of a well, and other fluids used to treat a well shall not be spread on a road.


Authorized Representative

SUBURBAN STEEL SUPPLY CO.
Company Name

*I certify that this is the signature of
Jerry Henderson, of Suburban Steel Supply Co, LLC
Signed before me on January 9, 2015*

1-9-2015

Date





VALERIE A. ARDREY
Notary Public, State of Ohio
My Comm. Expires July 15, 2015